

# VT60


## Maintenance smart tire pressure devices tester (TPMS)



- POCKET SIZE
- EASY OPERATION
- LARGE GRAPHIC DISPLAY
- LI-ION BATTERY
- STRONG ABS CASE
- USB INTERFACE

*The VT60 is a powerful and compact tester for all car manufacturers smart tire pressure devices.*

*Its small size makes it the ideal TPMS maintenance tool.*



### Main Features

- Two versions LF/RF and RF/RF
- LF (TX) 125 kHz continuous or modulated (OOK)
- RF (RX): 2 receivers allowing 4 frequencies among 315 MHz - 433.92 MHz - 434.42MHz)  
Available with manchester or NRZ encoding (others upon request)
- RF (TX) option on request with external directionnal antenna (300 - 500 MHz)
- Large graphic LCD display (128 x 64 dots)
- LED for LOW BAT / TX / PASS / FAIL/ CHARGE
- Internal LI-ON battery charger  
USB or external 5 V supply charging capability
- USB interface for configuration and upgrade (via email)
- Weight: 250 g
- Size in mm: H x L x D: 150 x 82 x 25



## Operation

### ■ Configuration

The operator configures the tester to select the type of smart pressure device and the operation cycle.

### ■ Normal Operation


A light press on the green button activates the tester.

A light press on the blue button when the tester is placed near the smart valve runs the selected cycle (test, wake up, shipping mode etc)



## Other TPMS products supplied by ATEQ

### ■ Automatic production line units

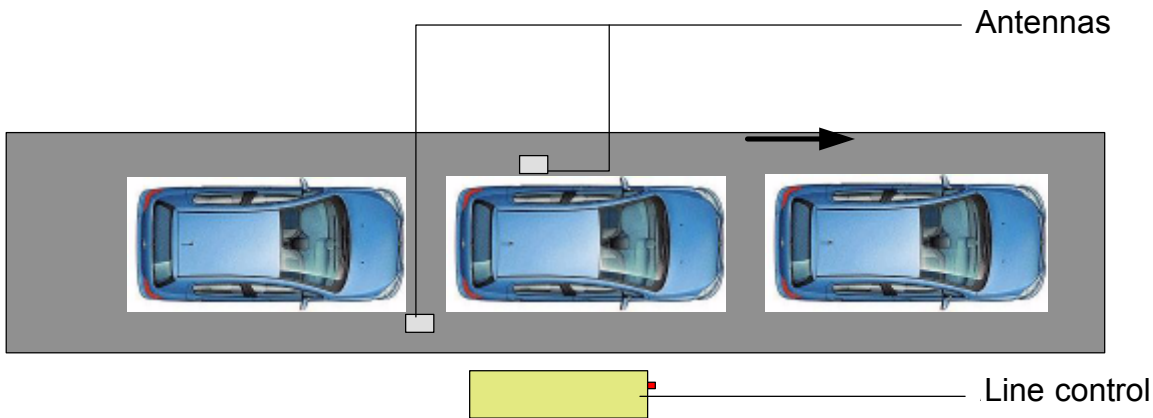

All configurations possible

### ■ Manual production line unit



- CAN vehicle network connector option
- Large LI-ION battery capacity
- LF/RF operation (RF/RF upon request)
- Long “noze” version for stand-up operation
- Also available without extra handle and short probe